

KUPU

www.kupuled.com

2025-2026

kupu

Address: No. 21-1 Yongchang Road, Huacheng Street, Huadu District, Guangzhou

Tel: 020-36933476 / 36963478

Tiktok: ALT1349

Website: www.kupuled.com

E-mail: kp@kupuled.com



Tiktok




GZAILITELED&KUPU, established in Guangzhou, China, is a comprehensive energy-saving technology enterprise that integrates the research and development, production, sales, and service of LED outdoor landscape lighting, cultural and tourism lighting, bridge and building lighting products. The company has been deeply involved in the field of lighting for more than 17 years, with outdoor high-power LED lighting technology as its core feature, focusing on providing professional and customized light environment solutions for global customers.


Our company's business covers OEM/ODM manufacturing and engineering project support. Our products are widely used in outdoor facilities, large-scale real estate, commercial advertising, tourist attractions, villa lighting and other fields. Our products are also exported to international markets such as the Middle East, Europe and America. Our main products include LED floodlights, wall washers, ambient lighting, interactive lighting equipment, and intelligent lighting control APP systems, with a power coverage of 1W-1260W. We are one of the enterprises in the industry with the most complete series of outdoor LED floodlights and the largest power span.

Relying on its independent research and development system, the company has mastered core technologies such as optical lens design, external structure development, PCB circuit optimization, and intelligent control systems, and holds more than 40 patent rights. With the research and development concept of "simplicity, comfort, softness, and energy saving", we have created a modular narrow beam imaging technology to achieve precise light control and efficient energy saving. Our products have passed ISO9001 quality management system certification and obtained authoritative qualifications such as CCC, CE, ROHS, CQCMA at home and abroad, and our quality is recognized by the industry.

Elite Optoelectronics always takes "light quality" as its foundation and is committed to creating the ultimate light environment. With our full industry chain R&D and manufacturing capabilities and global service network, we look forward to working together with our partners to empower urban lighting aesthetics with innovative technology and jointly build a green and smart lighting future.

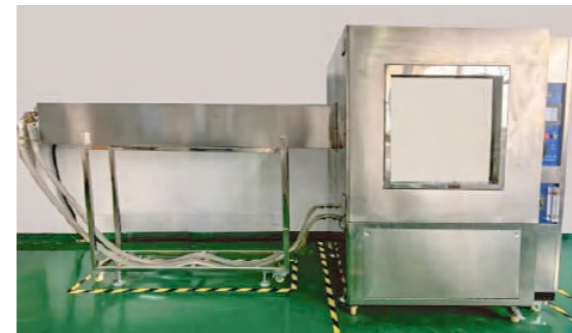


IP Waterproof Test

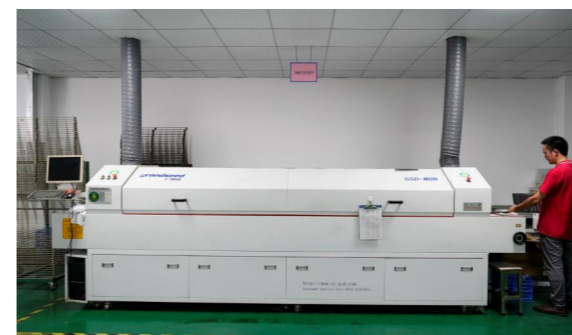

Reflow Soldering Equipment



Temperature Cycling Test

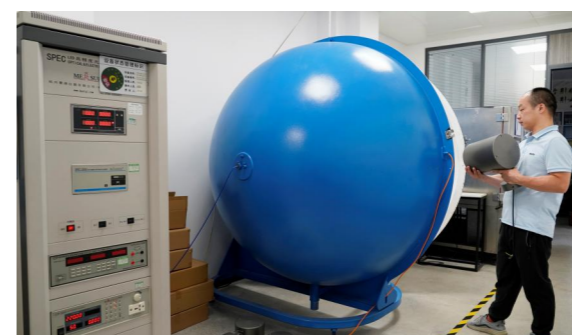

Integrating Sphere



SMT Equipment



Distributed Testing



Automated Sealing Equipment



Product Characteristics ▾

-Simplicity

Simplicity but not simplicity, simplicity but not casualness, integrating mature design concepts through the simplest design
Connecting lighting with everyday life!

-Comfort

The product has a simple and atmospheric appearance, seamlessly integrating with the building walls to create a perfect landscape!

-Soft

Natural, healthy, and comfortable lighting that complements the environment. defends against light pollution, and enhances the spatial beauty of the building!

∠ 1°



∠ 2.5°



∠ 3°



∠ 6°



∠ 15°



∠ 1×60°



Floodlight Series



KUPU-FG50S
50W
P01



KUPU-FG50
50W
P02



KUPU-FG100
100W
P03



KUPU-FG150
150W
P04



KUPU-FG200
200W
P05



KUPU-FG300
300W
P06



KUPU-FG400
400W
P07

LED Floodlight Series A



KUPU-T75A
75W
P08



KUPU-T100A
100W
P09



KUPU-T150A
150W
P10



KUPU-T200A
200W
P11



KUPU-T240A
240W
P12



KUPU-T300A
300W
P13



KUPU-T360A
360W
P14



KUPU-T400A
400W
P15



KUPU-T450A
72W / 96W
P16



KUPU-T500A
144W / 192W
P17



KUPU-T550A
216W / 288W
P18



KUPU-T600A
100W / 145W
P19

LED Floodlight Series B



KUPU-T30B
30W
P20



KUPU-T60B
60W
P21



KUPU-T80B
80W
P22



KUPU-T100B
100W
P23



KUPU-T120B
120W
P24



KUPU-T150B
150W
P25



KUPU-T200B
200W
P26



KUPU-T240B
240W
P27



KUPU-T300B
300W
P28



KUPU-T360B
360W
P29



KUPU-T400B
400W
P30




KUPU-T480B
480W
P31

kupu




FLOODLIGHT KUPU-FG50S

Product Size

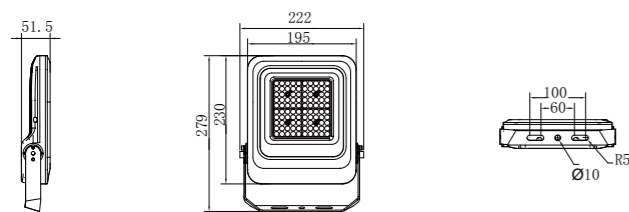

Technical features



Technical Data

Item	Floodlight Lamp
Wattage	50W
Light source	2835
Wattage	
IK Rating	IP65
Input voltage	AC220V
Cable gland	
Optics	30° / 60° / 90°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	1.7 KG
Package dimensions	700×252×317mm




kupu



FLOODLIGHT KUPU-FG50

Product Size

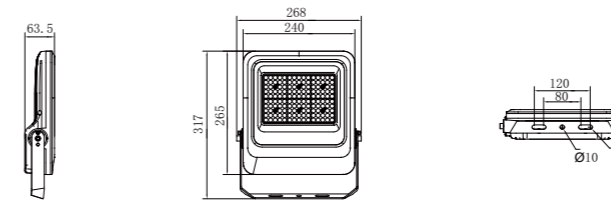

Technical features



Technical Data

Item	Floodlight Lamp
Wattage	50W
Light source	2835
Wattage	
IK Rating	IP65
Input voltage	AC220V
Cable gland	
Optics	30° / 60° / 90°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	2.3 KG
Package dimensions	656×297×357mm




kupu



FLOODLIGHT KUPU-FG100

Product Size

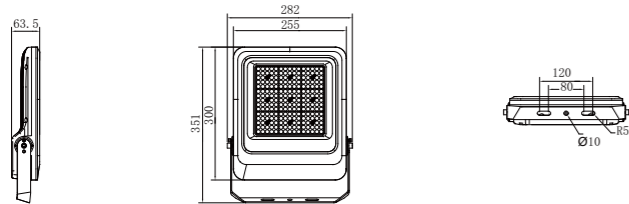

Technical features



Technical Data

Item	Floodlight Lamp
Wattage	100W
Light source	2835
Wattage	
IK Rating	IP65
Input voltage	AC220V
Cable gland	
Optics	30° / 60° / 90°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	2.85 KG
Package dimensions	492×315×392mm




kupu



FLOODLIGHT KUPU-FG150

Product Size

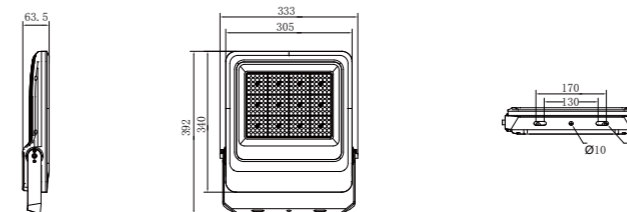

Technical features



Technical Data

Item	Floodlight Lamp
Wattage	150W
Light source	2835
Wattage	
IK Rating	IP65
Input voltage	AC220V
Cable gland	
Optics	30° / 60° / 90°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	4 KG
Package dimensions	410×365×435mm




kupu



FLOODLIGHT KUPU-FG200

Product Size

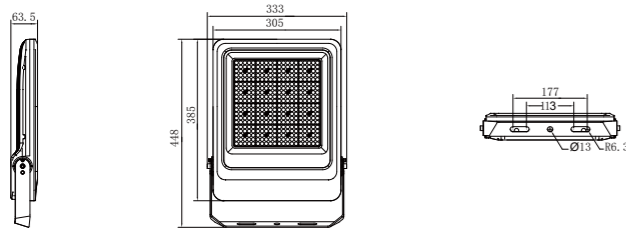

Technical features



Technical Data

Item	Floodlight Lamp
Wattage	200W
Light source	2835
Wattage	
IK Rating	IP65
Input voltage	AC220V
Cable gland	
Optics	30° / 60° / 90°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	4.7 KG
Package dimensions	495×390×485mm





kupu



FLOODLIGHT KUPU-FG300

Product Size

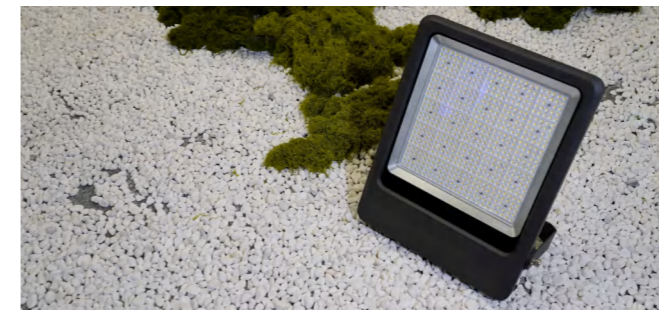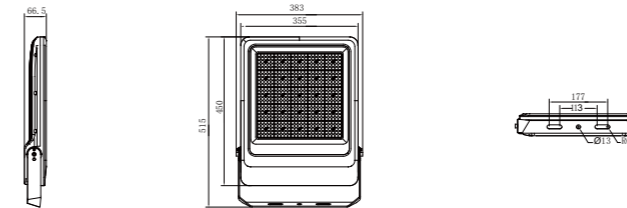

Technical features



Technical Data

Item	Floodlight Lamp
Wattage	300W
Light source	2835
Wattage	
IK Rating	IP65
Input voltage	AC220V
Cable gland	
Optics	30° / 60° / 90°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	6.5 KG
Package dimensions	575×435×400mm




kupu




FLOODLIGHT KUPU-FG400

Product Size

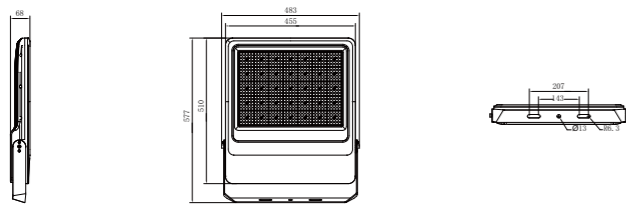

Technical features



Technical Data

Item	Floodlight Lamp
Wattage	400W
Light source	2835
Wattage	
IK Rating	IP65
Input voltage	AC220V
Cable gland	
Optics	30° / 60° / 90°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	9.7 KG
Package dimensions	645x535x275mm




kupu



LED FLOODLIGHT SERIES A-T75A

Product Size

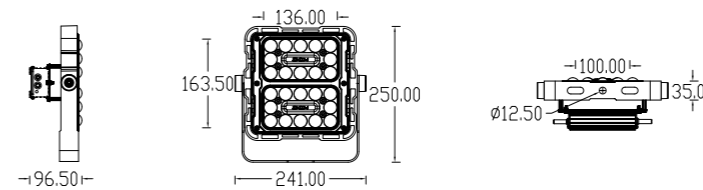

Technical features



Technical Data

Item	LED Floodlight
Wattage	75W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45° / 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	3.1 KG
Package dimensions	L265xW130xH265




kupu




LED FLOODLIGHT SERIES A-T100A

Product Size

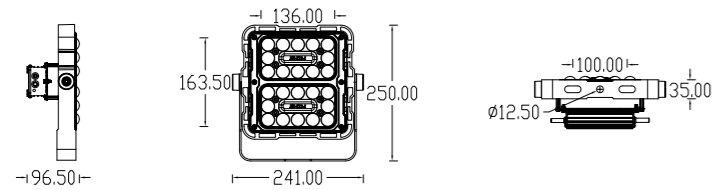

Technical features



Technical Data

Item	LED Floodlight
Wattage	100W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45°/ 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	3.1 KG
Package dimensions	L265×W130×H265




kupu



LED FLOODLIGHT SERIES A-T150A

Product Size

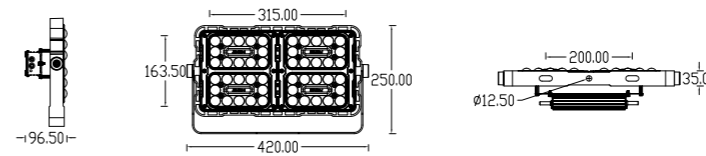


Technical features



Technical Data

Item	LED Floodlight
Wattage	150W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45°/ 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	4.9 KG
Package dimensions	L435×W130×H255mm

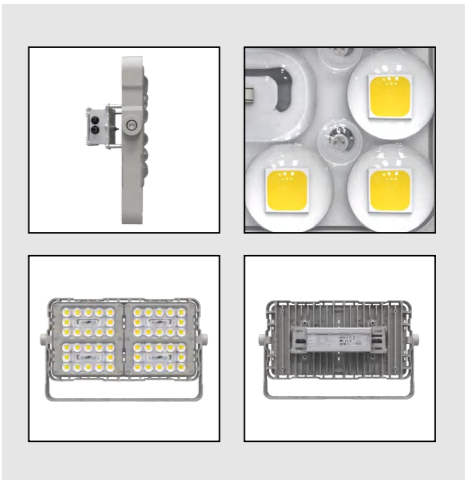


kupu



LED FLOODLIGHT SERIES A-T200A

Product Size

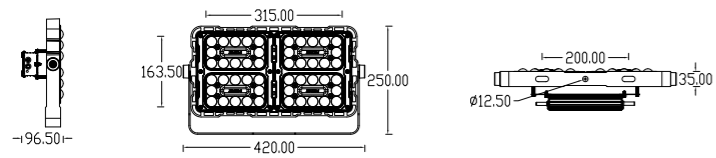


Technical features



Technical Data

Item	LED Floodlight
Wattage	200W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45°/ 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	4.9 KG
Package dimensions	L435×W130×H255mm

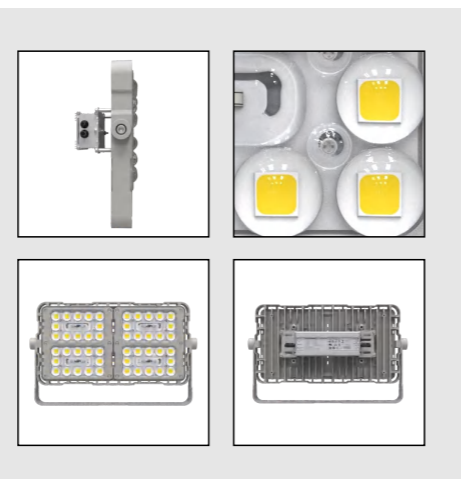


kupu



LED FLOODLIGHT SERIES A-T240A

Product Size

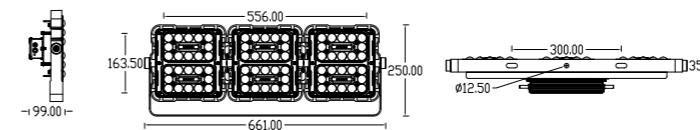


Technical features



Technical Data

Item	LED Floodlight
Wattage	240W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45°/ 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	7.7 KG
Package dimensions	L675×W130×H265mm


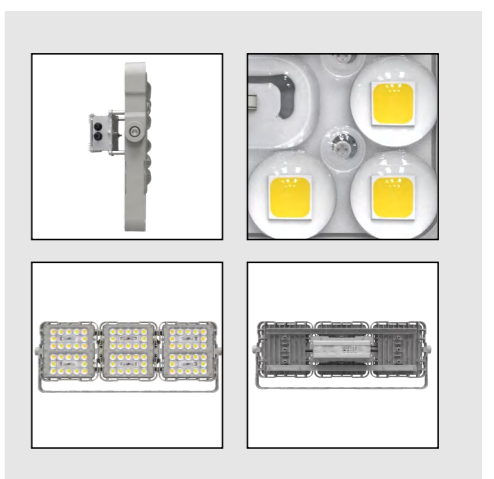


kupu



LED FLOODLIGHT SERIES A-T300A

Product Size

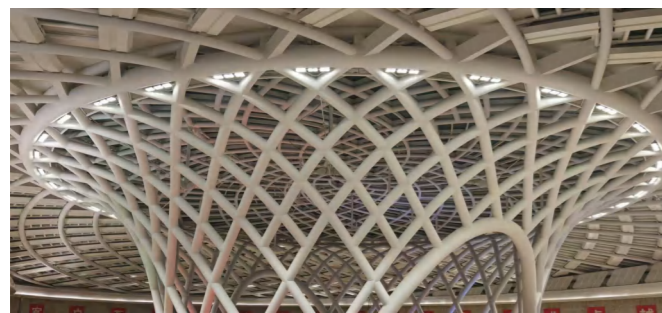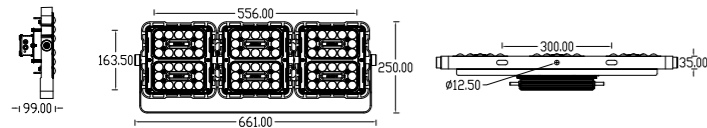


Technical features



Technical Data

Item	LED Floodlight
Wattage	300W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45°/ 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	7.7 KG
Package dimensions	L675×W130×H265mm

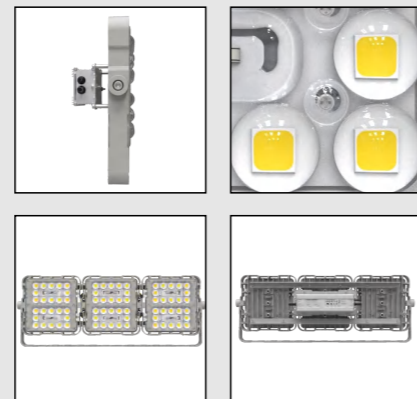


kupu




LED FLOODLIGHT SERIES A-T360A

Product Size

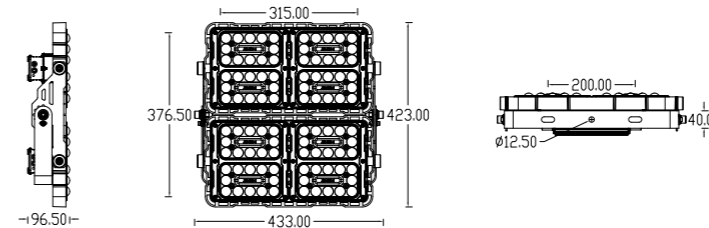


Technical features



Technical Data

Item	LED Floodlight
Wattage	360W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45°/ 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	9.8 KG
Package dimensions	L450×W130×H440mm

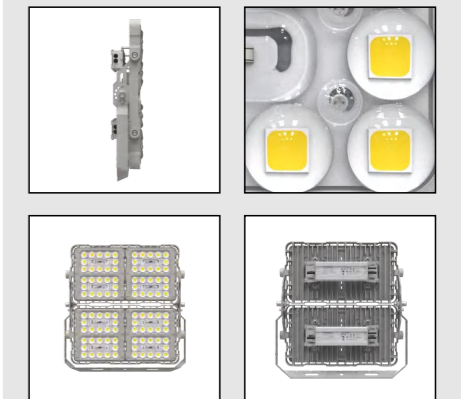


kupu




LED FLOODLIGHT SERIES A-T400A

Product Size

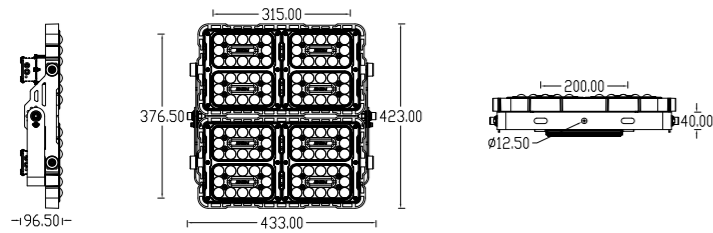


Technical features



Technical Data

Item	LED Floodlight
Wattage	400W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45°/ 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	9.8 KG
Package dimensions	L450xW130xH440mm

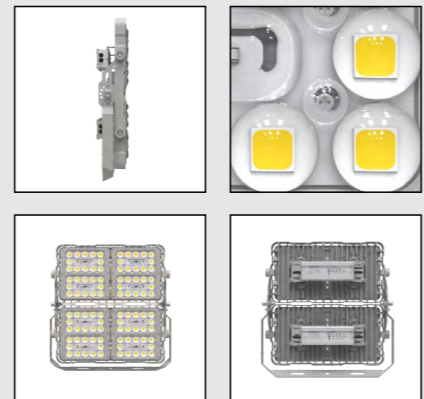


kupu



LED FLOODLIGHT SERIES A-T450A

Product Size

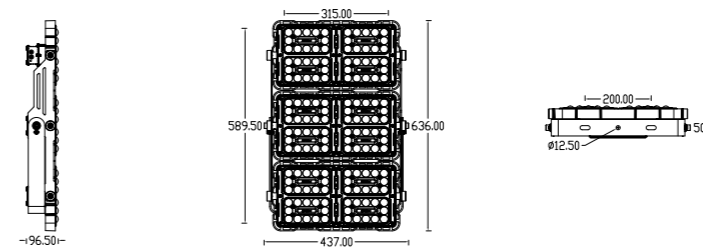


Technical features



Technical Data

Item	LED Floodlight
Wattage	450W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45°/ 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	14.5KG
Package dimensions	L450xW130xH650mm

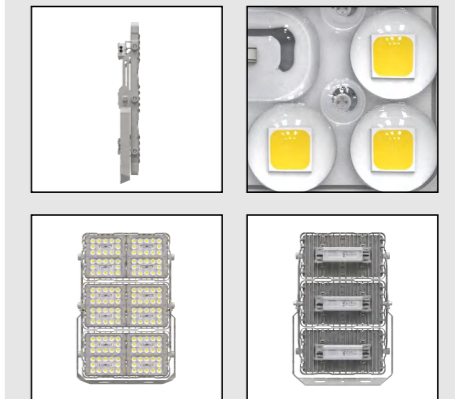


kupu




LED FLOODLIGHT SERIES A-T500A

Product Size

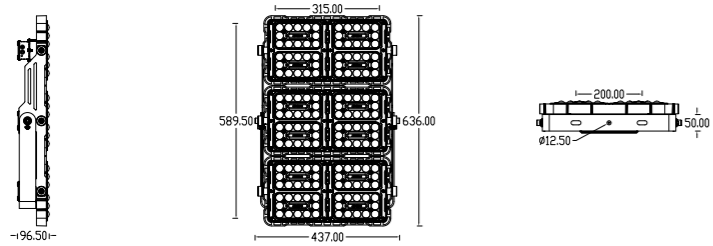


Technical features



Technical Data

Item	LED Floodlight
Wattage	500W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45°/ 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	14.5KG
Package dimensions	L450×W130×H650mm

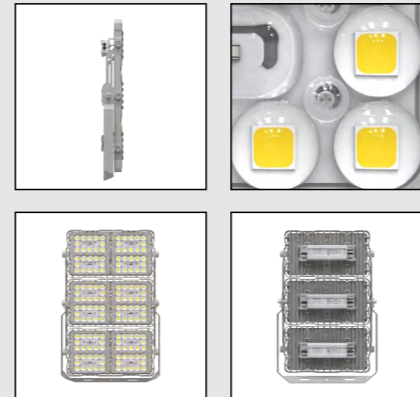


kupu



LED FLOODLIGHT SERIES A-T550A

Product Size

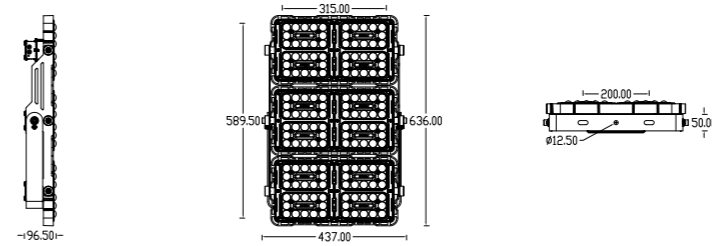


Technical features



Technical Data

Item	LED Floodlight
Wattage	550W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45°/ 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	14.5KG
Package dimensions	L450×W130×H650mm


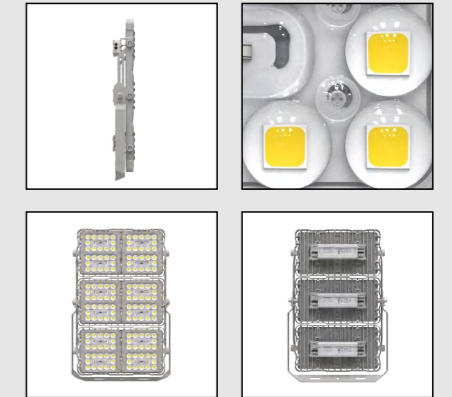


kupu



LED FLOODLIGHT SERIES A - T600A

Product Size

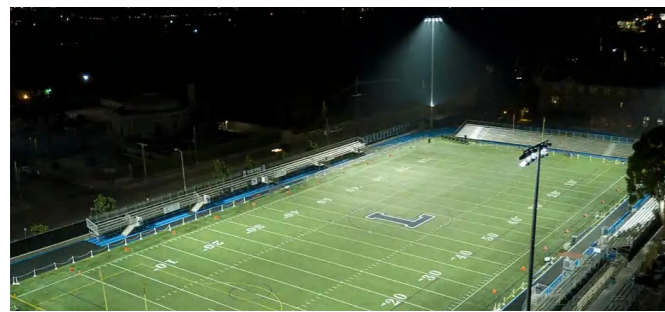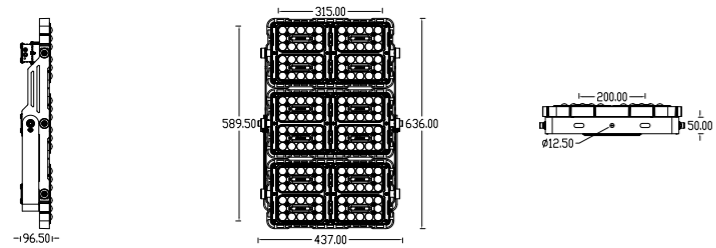


Technical features



Technical Data

Item	LED Floodlight
Wattage	600W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45°/ 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	14.5KG
Package dimensions	L450×W130×H650mm

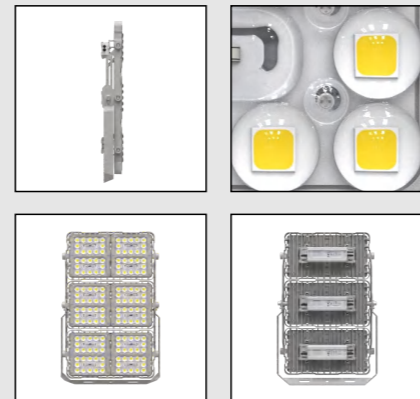


kupu



LED FLOODLIGHT SERIES B - T30B

Product Size

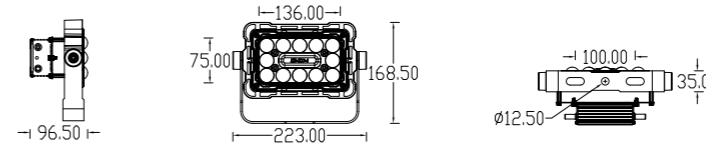


Technical features



Technical Data

Item	LED Floodlight
Wattage	30W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45°/ 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	2.4 KG
Package dimensions	L240×W130×H185

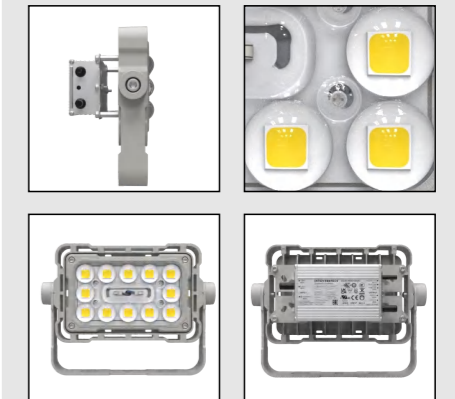


kupu



LED FLOODLIGHT SERIES B-T60B

Product Size

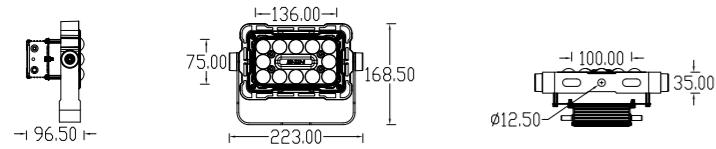

Technical features



Technical Data

Item	LED Floodlight
Wattage	60W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45°/ 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	2.4 KG
Package dimensions	L240×W130×H185




kupu



LED FLOODLIGHT SERIES B-T80B

Product Size

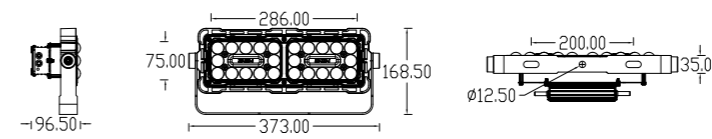


Technical features



Technical Data

Item	LED Floodlight
Wattage	80W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45°/ 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	3.7 KG
Package dimensions	L390×W130×H180

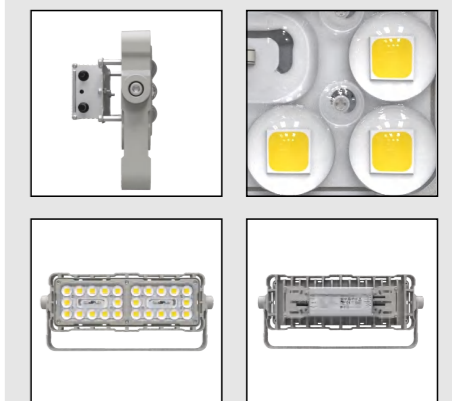


kupu




LED FLOODLIGHT SERIES B-T100B

Product Size

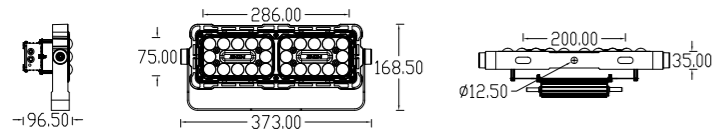


Technical features



Technical Data

Item	LED Floodlight
Wattage	100W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45°/ 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	3.7 KG
Package dimensions	L390×W130×H180

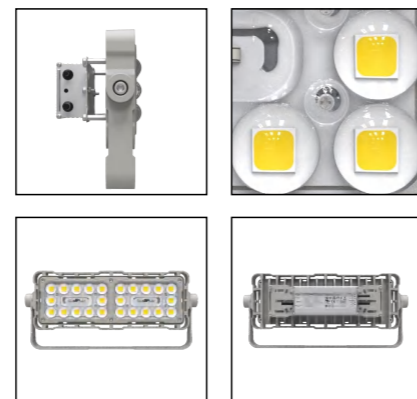


kupu




LED FLOODLIGHT SERIES B-T120B

Product Size

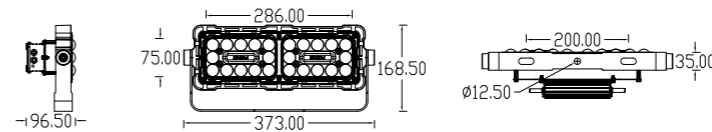


Technical features



Technical Data

Item	LED Floodlight
Wattage	120W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45°/ 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	3.7 KG
Package dimensions	L390×W130×H180

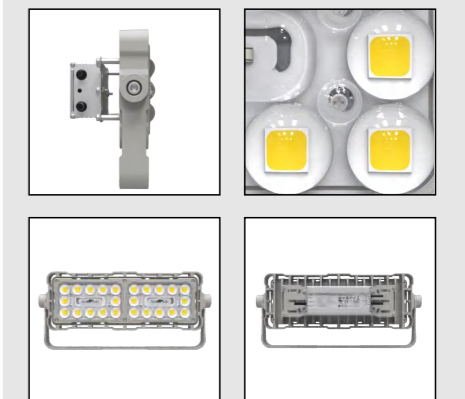


kupu



LED FLOODLIGHT SERIES B-T150B

Product Size

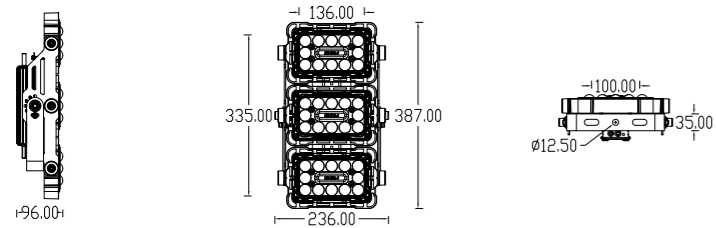


Technical features



Technical Data

Item	LED Floodlight
Wattage	150W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45° / 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	5.1KG
Package dimensions	L250×W130×H410

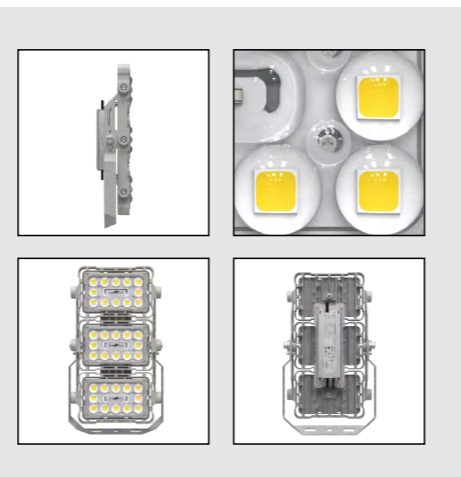


kupu



LED FLOODLIGHT SERIES B-T200B

Product Size

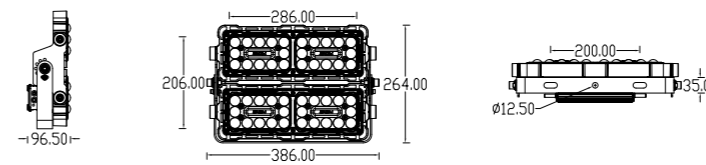


Technical features



Technical Data

Item	LED Floodlight
Wattage	200W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45° / 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	5.1KG
Package dimensions	L250×W130×H410

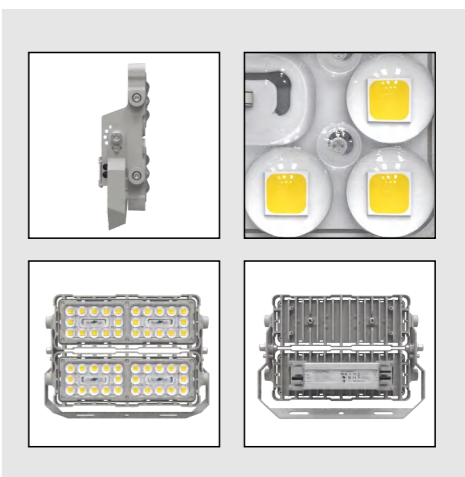


kupu



LED FLOODLIGHT SERIES B -T240B

Product Size

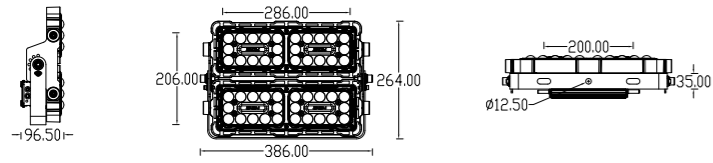


Technical features



Technical Data

Item	LED Floodlight
Wattage	240W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45° / 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	5.1KG
Package dimensions	L250×W130×H410

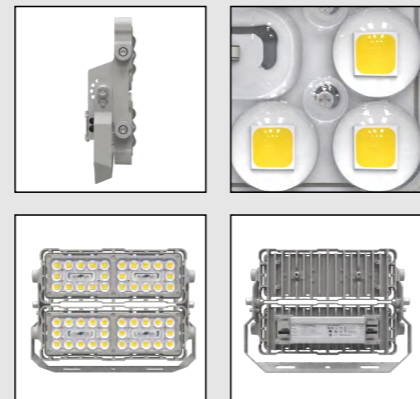


kupu



LED FLOODLIGHT SERIES B -T300B

Product Size

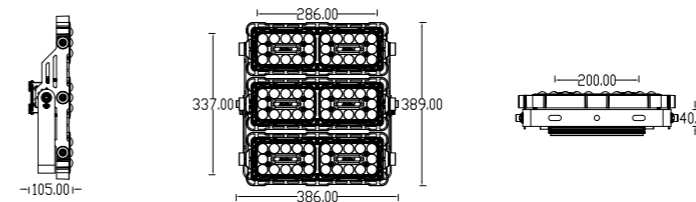


Technical features



Technical Data

Item	LED Floodlight
Wattage	300W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45° / 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	9.3KG
Package dimensions	L405×W130×H405

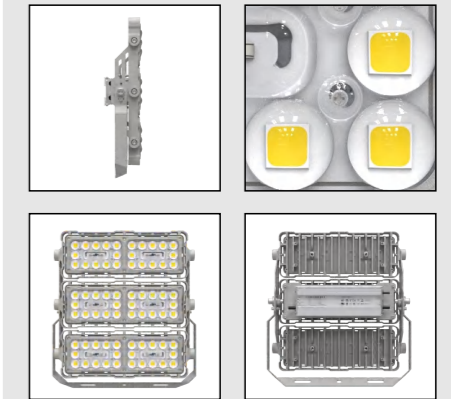


kupu




LED FLOODLIGHT SERIES B - T360B

Product Size

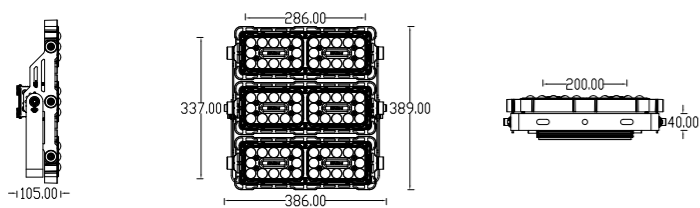


Technical features



Technical Data

Item	LED Floodlight
Wattage	360W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45° / 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	9.3KG
Package dimensions	L405×W130×H405

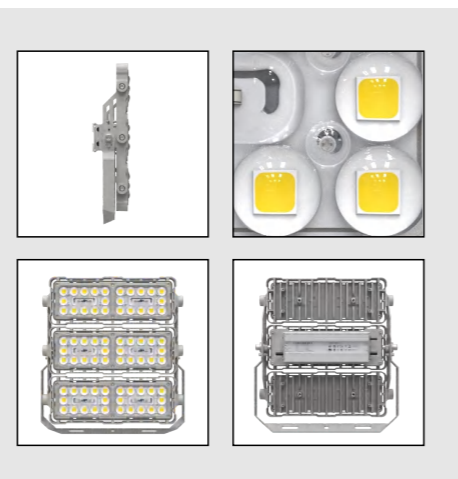


kupu



LED FLOODLIGHT SERIES B - T400B

Product Size

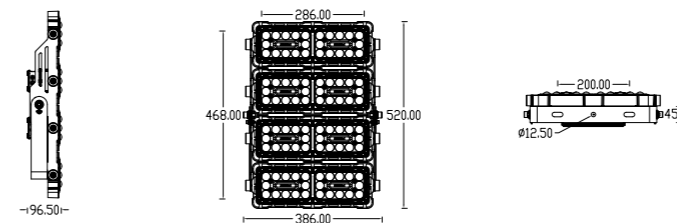


Technical features



Technical Data

Item	LED Floodlight
Wattage	400W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45° / 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	12.2KG
Package dimensions	L400×W130×H535

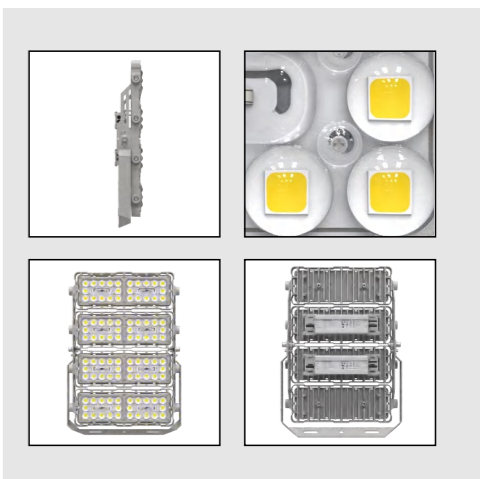


kupu




LED FLOODLIGHT SERIES B-T480B

Product Size

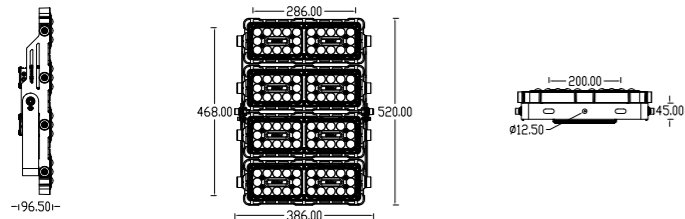

Technical features



Technical Data

Item	LED Floodlight
Wattage	480W
Light source	7070
Wattage	
IK Rating	IP66
Input voltage	AC110-220V
Cable gland	
Optics	35°/45°/ 60°/90° / 120°
Material	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Total weight	12.2KG
Package dimensions	L400×W130×H535

kupu

www.kupuled.com

